

## YPM80 pressure transmitter




### ◇ Overview said

YPM80 pressure transmitter adopts international standard housing. It adopts piezoresistive pressure sensor to integrate sensor, electronic circuit, microprocessor and display control. It is easy to use.

### ◇ 特点

- 直接过程连接
- 体积小、重量轻
- 零位可迁移
- 抗射频干扰
- 过电压保护

### ◇ 外形尺寸

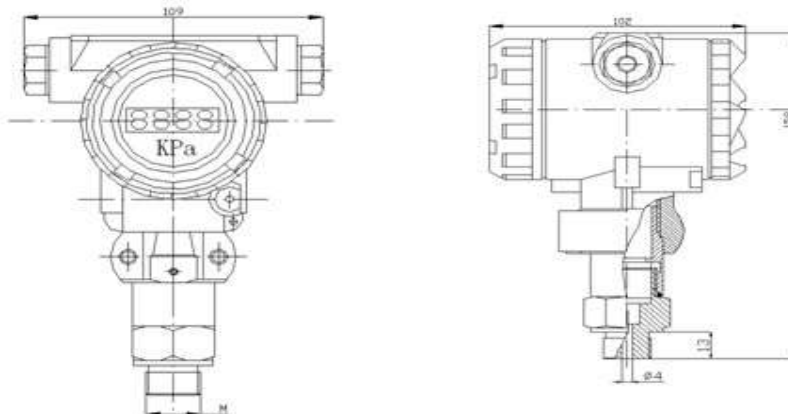

◆ 选型说明

|       |                 |       |   |   |      |
|-------|-----------------|-------|---|---|------|
| YPM80 |                 | 压力变送器 |   |   |      |
| 代号    | 量程范围            |       |   |   |      |
| 1     | 0~20KPa         |       |   |   |      |
| 2     | 0~70KPa         |       |   |   |      |
| 3     | 0~350KPa        |       |   |   |      |
| 4     | 0~700KPa        |       |   |   |      |
| 5     | 0~3.5MPa        |       |   |   |      |
| 6     | 0~7MPa          |       |   |   |      |
| 7     | 0~35MPa         |       |   |   |      |
| 8     | 0~120MPa        |       |   |   |      |
| 代号    | 输出信号            |       |   |   |      |
| 1     | 4~20mADC        |       |   |   |      |
| 代号    | 输入连接            |       |   |   |      |
| M     | 标准型 M20×1.5 外螺纹 |       |   |   |      |
| R     | 按用户提供尺寸加工       |       |   |   |      |
| 代号    | 选项              |       |   |   |      |
| D     | DC220V          |       |   |   |      |
| Z     | DC24V           |       |   |   |      |
| A     | AC220V          |       |   |   |      |
| G     | 表压测量            |       |   |   |      |
| F     | 负压测量            |       |   |   |      |
| P     | 齐平膜片            |       |   |   |      |
| YPM80 | 1               | 1     | M | G | 选型举例 |